ROHS

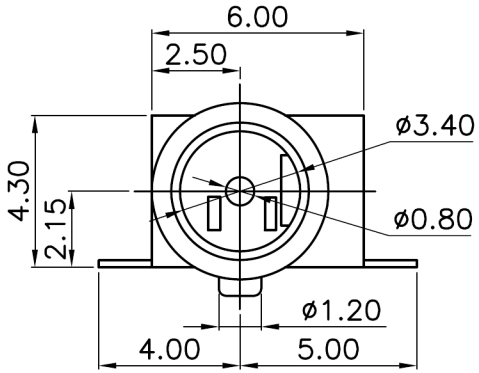



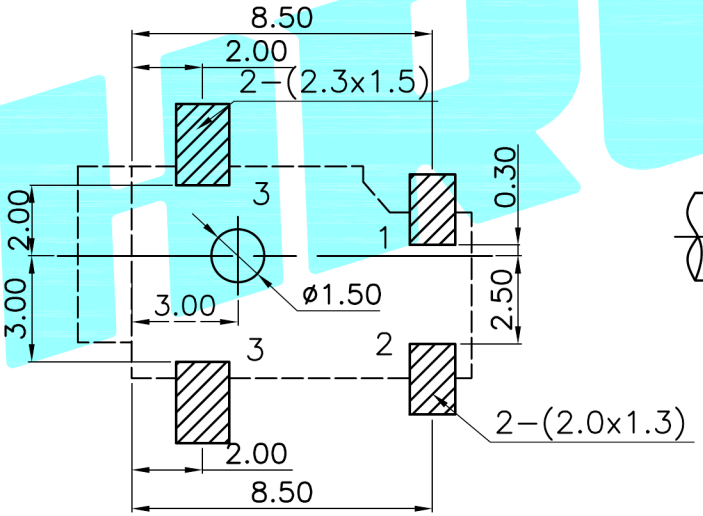



Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature: -20℃~70℃
Operating force:3 20N
Operating life:5,000cycles

②	Terminal	3	Phosphor bronze Au Plating
①	Housing	1	Nylon Black

NO.	PART NAME	QTY	PART NO.	Q'TY	MATERIAL	FINISHING	REMARK

APPROVALS DATE

DRAWN K.X.Zhang 2013/11/01

CHECKED

APPROVALS

UNIT: mm SCALE: 1:1 PROJ.

TOLERANCES ARE: 0.30 ANGLE

DRAWING NO. SHEET 1 OF 1

DRAWN CHECK. APPRO.

ECN NO.	REV.	DATE.	DESCRIPTION.	CH
	A		NEW	